




PGHS-N

Thin wall halogen free,flexible
heat shrink tubing.



Features

- Thin wall
- Flexible
- Halogen free
- Flame retardant
- Continuous operating
Temperature:-55°C to 125°C
- Fully shrink temperature:125°C
- RoHS and Sony compliant

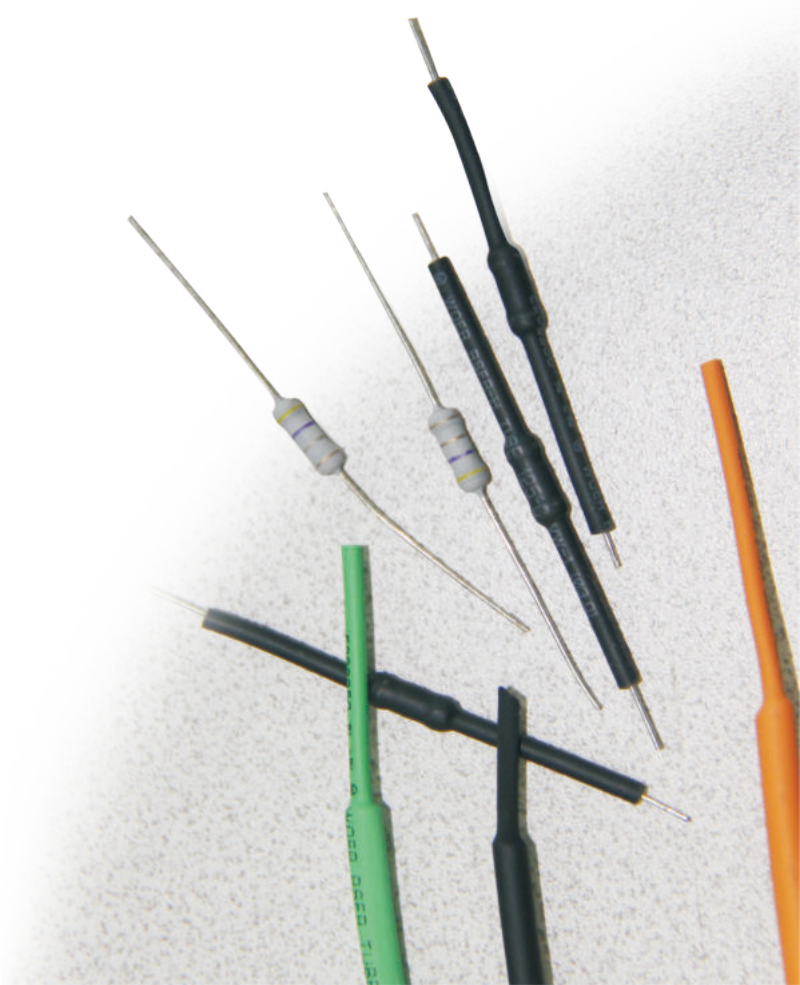

Dimensions

Size		As Supplied	After Recovery		Standard Package
Inch	mm	Inner Diameter mm	Inner Diameter Max mm	Wall Thickness Nom mm	Spool Length M/spool
3/64	0.8	1.1±0.2	0.50	0.22	400
1/16	1.0	1.5±0.2	0.65	0.28	400
	1.5	2.0±0.2	0.85	0.32	400
3/32	2.0	2.5±0.2	1.00	0.35	400
	2.5	3.0±0.2	1.30	0.38	400
1/8	3.0	3.5±0.2	1.50	0.40	400
	3.5	4.0±0.2	1.80	0.42	400
	4.0	4.5±0.2	2.00	0.45	400
3/16	4.5	5.0±0.2	2.30	0.50	200
	5.0	5.5±0.2	2.50	0.55	200
1/4	6.0	6.5±0.2	3.00	0.55	200
5/16	7.0	7.5±0.3	3.50	0.55	100
	8.0	8.5±0.3	4.00	0.60	100
3/8	9.0	9.5±0.3	4.50	0.60	100
	10.0	10.5±0.3	5.00	0.60	100
	11.0	11.5±0.3	5.50	0.60	100
1/2	12.0	12.5±0.3	6.00	0.60	100
	13.0	13.5±0.3	6.50	0.65	100
	14.0	14.5±0.3	7.00	0.65	100
5/8	15.0	15.5±0.4	7.50	0.70	100
	16.0	16.5±0.4	8.00	0.70	100
	17.0	17.5±0.4	8.50	0.70	100
3/4	18.0	19.0±0.5	9.00	0.80	100
	20.0	21.0±0.5	10.00	0.80	100
	22.0	23.0±0.5	11.00	0.80	100
1	25.0	26.0±0.5	12.50	0.90	50
	28.0	29.0±0.5	14.00	0.90	50
1-1/4	30.0	31.5±1.0	15.00	0.95	50
	35.0	36.5±1.0	17.50	0.95	50
1-1/2	40.0	41.5±1.0	20.00	0.95	50
	45.0	46.5±1.0	22.50	1.00	25
2	50.0	≥50.0	25.00	1.00	25
	60.0	≥60.0	31.00	1.00	25
	70.0	≥70.0	36.00	1.10	25
3	80.0	≥80.0	41.00	1.20	25
	90.0	≥90.0	46.00	1.20	25
4	100.0	≥100.0	51.00	1.20	25
5	120.0	≥120.0	61.00	1.30	25
6	150.0	≥150.0	76.00	1.30	25
7	180.0	≥180.0	91.00	1.46	25

Technical Data

Property	Test Method	Typical Performance
Tensile strength(MPa)	ASTM D 2671	≥10.4
Ultimate elongation(%)	ASTM D 2671	≥200
Tensile strength after heat aged (Mpa)	158°CX168h	≥7.3
Ultimate elongation after heat aged (%)	158°CX168h	≥100
Longitudinal change	ASTM D 2671	-5%~+5%
Flammability	ASTM D 2671 C method	VW-1
Dielectric strength (kV/mm)	ASTM D 149	≥15
Volume resistivity (Ω · cm)	ASTM D 876	≥10 ¹⁴